

## KAPRIX SPECIFICATIONS

### TYPICAL INSTALLATIONS

- Theatres and Performing Arts Centers
- Houses of Worship
- Convention Centers, Arenas and Exhibit Halls
- Museums
- Academic Institutions - Auditoriums
- Dry and Damp Locations
- Optimum Installation Heights: 25ft (7.6m) to 50ft (15.2m)

### LEDs, OPTIC AND OUTPUT


- 90+ CRI minimum each channel
- 95CRI typical both channels on
- 25, 35, and 60 degree beam
- 10,400 lumen output at 140W
- CCT Range: 2700K to 6500K

### PHYSICAL

- 9.75in (247.6mm) diameter
- 14.57in (370.0mm) length
- Unit weight: 10lbs (4.5kg) without mountings
- High performance LED engine, driver and power supplies
- No noise with efficient passive cooling (no internal fans)
- All aluminum construction
- Standard black and off-white housing colors available in matte, semi-gloss, or glossy finishes

### OPTIONS

- Custom RAL color housings
- Custom housing graphics
- Brushed aluminum housing
- Mounting options include: C-clamp, Wall Bracket, Yoke, Pendant (up to 42° swivel), Air Craft Cable, and Flat/ Sloped Ceiling Recessed Kits
- DMX Connectors: RJ45 (standard), XLR 5-PIN, Screw Terminal, and IDC

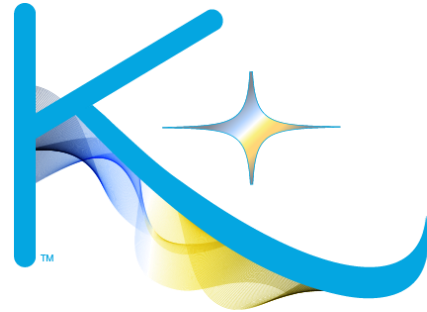

Kaprix™ by AQUARII



PROJECT- \_\_\_\_\_  
 ORDER CODE- \_\_\_\_\_  
 QUANTITY- \_\_\_\_\_

### ELECTRICAL

- Available Wattage: 140W
- 100-305 VAC, 47-63 Hz
- IP20 Rated
- ETL listed to UL and cUL standards
- Rated for non-IC (Insulation Contact) Environments

### CONTROLS

- DMX/RDM
- 2 Channel DMX (CCT, Intensity)

*Please note that any custom orders or request may result in a longer lead time and additional costs.*

Ordering Code Example: KA-35-D-B-M-1-B-R-N

TYPE - KA							
Beam Angle Degree	Control	Housing Color	Color Finish	Mounting	Power Connector <sup>1</sup>	Terminals	Options
25	<b>D</b> (DMX/RDM <sup>2</sup> )	<b>B</b> (Black)	<b>M</b> (Matte)	<b>1</b> (C-Clamp)	<b>B</b> (Bare End; 5ft (1.5m) Std. <sup>5</sup> )	<b>R</b> (RJ-45 / standard)	<b>N</b> (None)
35		<b>W</b> (Off-White)	<b>S</b> (Semi-Gloss)	<b>2</b> (Wall Bracket)	<b>515</b> (NEMA 5-15; 125V/15A)	<b>X</b> (XLR-5 Pin)	
60		<b>C</b> (Custom <sup>1</sup> )	<b>G</b> (Gloss)	<b>3</b> (Yoke)	<b>L515</b> (NEMA L5-15; 125V/15A, Locking-type)	<b>ST</b> (Screw Terminal)	
		<b>A</b> (Brushed Aluminum <sup>1</sup> )		<b>4</b> (Pendant; Length required)	<b>AP</b> (Alternate Plug Style <sup>1</sup> )	<b>I</b> (Insulation Displacement Connector)	
		<b>G</b> (Graphic <sup>1</sup> )		<b>5</b> (Air Craft Cable Pendant; Length required)	<b>N</b> (None)		
				<b>6</b> (Flat Recessed)			
				<b>7</b> (Sloped Recessed <sup>1,4</sup> )			

<sup>1</sup> Consult factory before ordering.  
<sup>2</sup> DMX/RDM controls choice can be connected with DMX or DMX/RDM controls.  
<sup>4</sup> Recessed sloped kits must be installed in accessible ceilings.