



KAPRIX SPECIFICATIONS

TYPICAL INSTALLATIONS

- Theatres and Performing Arts Centers
- Houses of Worship
- Convention Centers, Arenas and Exhibit Halls
- Museums
- Academic Institutions - Auditoriums
- Dry and Damp Locations
- Optimum Installation Heights: 25ft (7.6m) to 50ft (15.2m)

LEDs, OPTIC AND OUTPUT


- 90+ CRI minimum each channel
- 95CRI typical both channels on
- 25, 35, and 60 degree beam
- 10,400 lumen output at 140W
- CCT Range: 2700K to 6500K

PHYSICAL

- 9.75in (247.6mm) diameter
- 14.57in (370.0mm) length
- Unit weight: 10lbs (4.5kg) without mountings
- High performance LED engine, driver and power supplies
- No noise with efficient passive cooling (no internal fans)
- All aluminum construction
- Standard black and off-white housing colors available in matte, semi-gloss, or glossy finishes

OPTIONS

- Custom RAL color housings
- Custom housing graphics
- Brushed aluminum housing
- Mounting options include: C-clamp, Wall Bracket, Yoke, Pendant (up to 42° swivel), Air Craft Cable, and Flat/ Sloped Ceiling Recessed Kits
- DMX Connectors: RJ45 (standard), XLR 5-PIN, Screw Terminal, and IDC

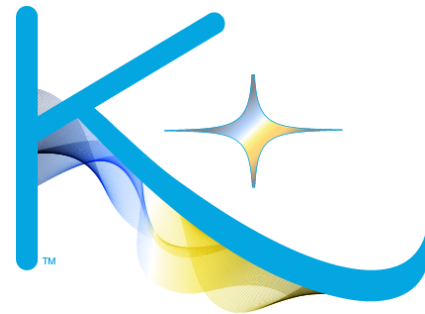

Kaprix™ by AQUARIUM



PROJECT- _____
ORDER CODE- _____
QUANTITY- _____

ELECTRICAL

- Available Wattage: 140W
- 100-305 VAC, 47-63 Hz
- IP20 Rated
- ETL listed to UL and cUL standards
- Rated for non-IC (Insulation Contact) Environments

CONTROLS

- DMX/RDM
- 2 Channel DMX (CCT, Intensity)

Please note that any custom orders or request may result in a longer lead time and additional costs.



For further information on products, design and engineering services, specifications, IES downloads, and pricing, call (315)672-8807, visit our website at www.aquariitech.com, or e-mail sales@aquariitech.com

Ordering Code Example: KA-35-D-B-M-1-B-R-N

TYPE - KA							
Beam Angle Degree	Control	Housing Color	Color Finish	Mounting	Power Connector ¹	Terminals	Options
25	D (DMX/RDM ²)	B (Black)	M (Matte)	1 (C-Clamp)	B (Bare End; 5ft (1.5m) Std. ⁵)	R (RJ-45 / standard)	N (None)
35		W (Off-White)	S (Semi-Gloss)	2 (Wall Bracket)	515 (NEMA 5-15; 125V/15A)	X (XLR-5 Pin)	
60		C (Custom ¹)	G (Gloss)	3 (Yoke)	L515 (NEMA L5-15; 125V/15A, Locking-type)	ST (Screw Terminal)	
		A (Brushed Aluminum ¹)		4 (Pendant; Length required)	AP (Alternate Plug Style ¹)	I (Insulation Displacement Connector)	
		G (Graphic ¹)		5 (Air Craft Cable Pendant; Length required)	N (None)		
				6 (Flat Recessed)			
				7 (Sloped Recessed ^{1, 4})			
¹ Consult factory before ordering. ² DMX/RDM controls choice can be connected with DMX or DMX/RDM controls. ⁴ Recessed sloped kits must be installed in accessible ceilings.							