

Filename: AX-125-30-18

Manufacturer: AQUARII, INC.

Luminaire: AXCELERON

Lamp: 3000K, 18DEG

Lamp Output: 1 lamp, total luminaire Lumens: 10671.4

Max Candela: 91,561.5 at Horizontal: 0°, Vertical: 0°

Input Wattage: 132.7

Luminous Opening: Circular (Dia: 9.48")


Test Lab: INTERTEK

Photometry : Type C

CIE Class: Direct

Cutoff Class: Full Cutoff

Nema Type: 3 X 3


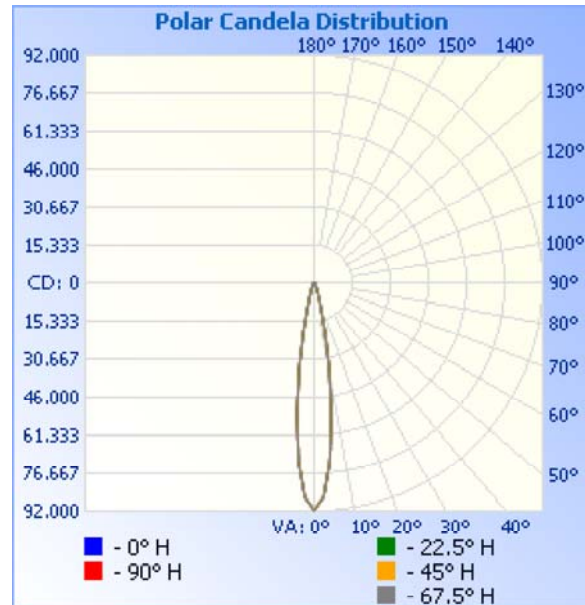


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	10,053.9	94.2%
0-40	10,444.2	97.9%
0-60	10,670.8	100%
60-90	0.5	0%
70-100	0	0%
90-120	0	0%
0-90	10,671.4	100%
90-180	0	0%
0-180	10,671.4	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	5,565.0	52.1%	90-100	0	0%
10-20	3,490.2	32.7%	100-110	0	0%
20-30	998.8	9.4%	110-120	0	0%
30-40	390.3	3.7%	120-130	0	0%
40-50	171.6	1.6%	130-140	0	0%
50-60	55.0	0.5%	140-150	0	0%
60-70	0.5	0.0%	150-160	0	0%
70-80	0	0.0%	160-170	0	0%
80-90	0	0.0%	170-180	0	0%

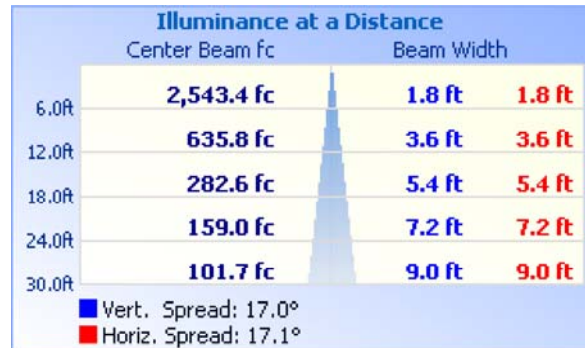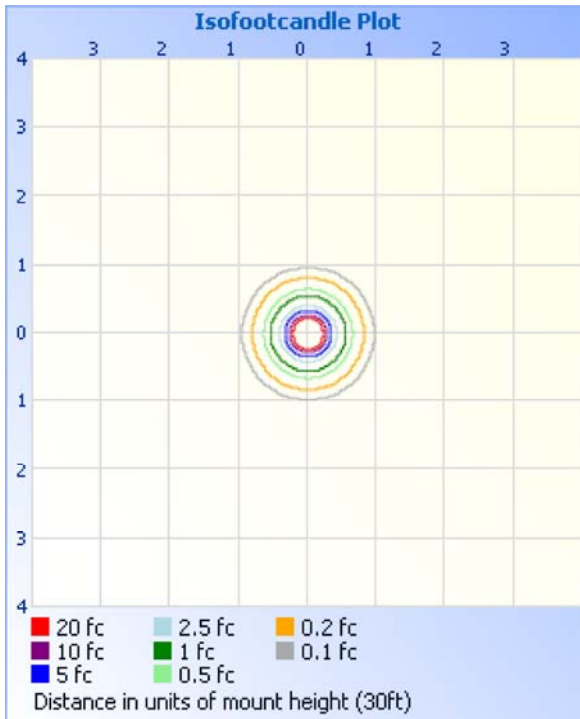

# Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00
1	1.15	1.13	1.12	1.10	1.13	1.11	1.10	.98	1.07	1.06	1.05	1.04	1.04	1.03	1.02	1.00	1.00	.99	.99	.97	.97
2	1.12	1.09	1.06	1.04	1.10	1.07	1.05	.95	1.04	1.02	1.00	1.01	1.01	1.00	.98	.99	.97	.96	.96	.95	.95
3	1.09	1.05	1.01	.99	1.07	1.03	1.00	.93	1.01	.99	.97	.99	.97	.95	.97	.95	.97	.95	.94	.92	.92
4	1.06	1.01	.98	.95	1.05	1.00	.97	.91	.98	.96	.93	.96	.94	.92	.95	.93	.91	.90	.90	.89	.88
5	1.03	.98	.94	.92	1.02	.97	.94	.89	.96	.93	.91	.94	.92	.90	.93	.91	.89	.88	.86	.86	.86
6	1.01	.95	.92	.89	1.00	.95	.91	.87	.94	.90	.88	.92	.90	.88	.91	.89	.87	.85	.84	.83	.83
7	.99	.93	.89	.87	.98	.92	.89	.85	.91	.88	.86	.90	.88	.86	.89	.87	.85	.84	.83	.81	.81
8	.97	.91	.87	.85	.96	.90	.87	.83	.89	.86	.84	.89	.86	.84	.88	.85	.84	.83	.81	.80	.80
9	.95	.89	.85	.83	.94	.88	.85	.82	.88	.85	.82	.87	.84	.82	.86	.84	.82	.81	.80	.79	.79
10	.93	.87	.83	.81	.92	.87	.83	.80	.86	.83	.81	.85	.83	.81	.85	.82	.81	.80	.79	.78	.78

## Luminaire Report Summary

IESNA:LM-63-2002

[LUMCAT]

[LUMINAIRE] AXCELERON

[LAMP] 3000K, 18DEG

[USER DEFINED] 120.06 AC, 1112.2 mA, 132.79 W, 0.9944 PF

[TEST]

[TESTLAB] INTERTEK

[ISSUEDATE] 2018-01-25

[MANUFAC] AQUARII, INC.

FILE: CREATED USING ABSOLUTE PHOTOMETRY

FILE: CANDELA MULTIPLIER: 1

FILE: VERTICAL ANGLES: 73, HORIZONTAL ANGLES: 17

FILE: COORDINATE SYSTEM: TYPE C

FILE: UNIT OF MEASURE: STANDARD

FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.28 copyright 2003-2018 by jSolutions, Inc.

Reported data calculated from manufacturer's data file, based on IES recommended methods.