

Filename: ZN-50-30-18

Manufacturer: AQUARII, INC.

Luminaire: ZINO

Lamp: 3000K, 18DEG

Lamp Output: 1 lamp, total luminaire Lumens: 4417.1

Max Candela: 37,637.1 at Horizontal: 0°, Vertical: 0°

Input Wattage: 52.6

Luminous Opening: Circular (Dia: 6.48")


Test Lab: INTERTEK

Photometry : Type C

CIE Class: Direct

Cutoff Class: Full Cutoff

Nema Type: 3 X 3


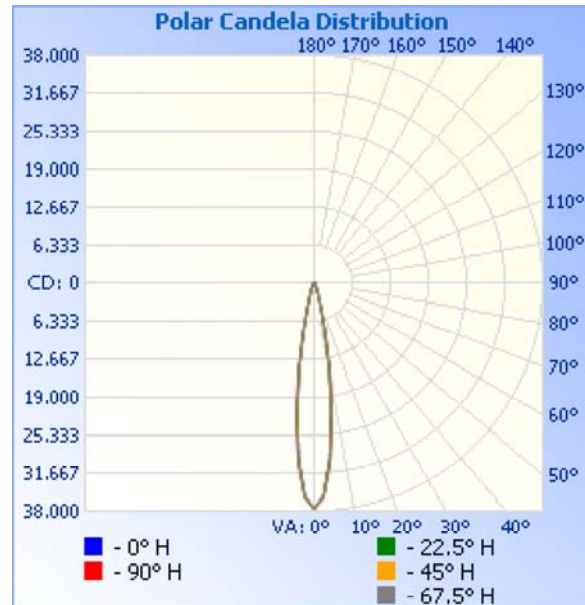


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	4,184.3	94.7%
0-40	4,337.7	98.2%
0-60	4,417.1	100%
60-90	0	0%
70-100	0	0%
90-120	0	0%
0-90	4,417.1	100%
90-180	0	0%
0-180	4,417.1	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	2,309.2	52.3%	90-100	0	0%
10-20	1,469.3	33.3%	100-110	0	0%
20-30	405.8	9.2%	110-120	0	0%
30-40	153.4	3.5%	120-130	0	0%
40-50	62.6	1.4%	130-140	0	0%
50-60	16.8	0.4%	140-150	0	0%
60-70	0	0.0%	150-160	0	0%
70-80	0	0.0%	160-170	0	0%
80-90	0	0.0%	170-180	0	0%

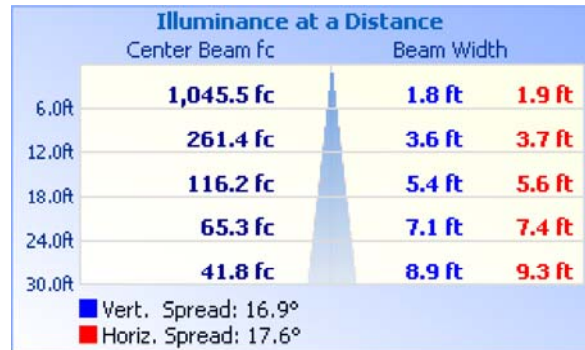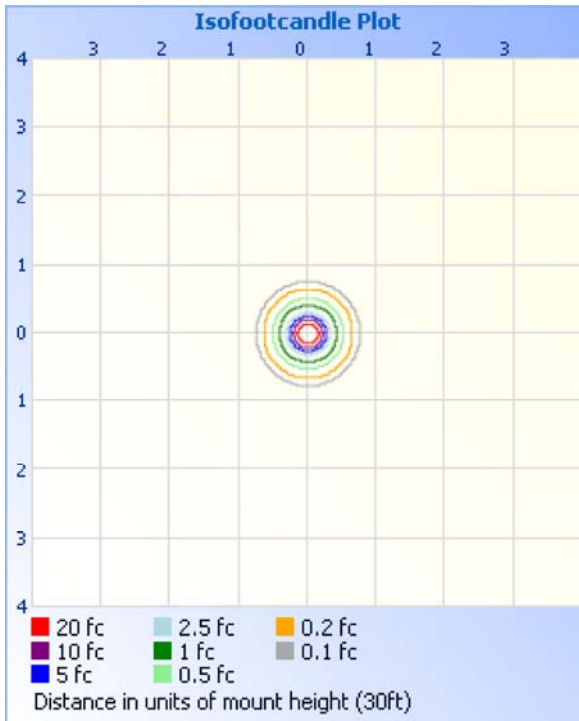

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.00	1.00
1	1.15	1.13	1.12	1.10	1.13	1.11	1.10	.98	1.07	1.06	1.05	1.04	1.04	1.03	1.02	1.00	1.00	.99	.99	.97	.97
2	1.12	1.09	1.06	1.04	1.10	1.07	1.05	.95	1.04	1.02	1.00	1.01	1.01	1.00	.98	.99	.97	.96	.96	.95	.95
3	1.09	1.05	1.02	.99	1.07	1.04	1.01	.93	1.01	.99	.97	.99	.97	.95	.97	.95	.97	.95	.94	.93	.93
4	1.06	1.01	.98	.95	1.05	1.00	.97	.91	.98	.96	.94	.97	.94	.93	.95	.93	.92	.92	.90	.90	.90
5	1.04	.98	.95	.92	1.02	.98	.94	.89	.96	.93	.91	.95	.92	.90	.93	.91	.89	.88	.88	.88	.88
6	1.01	.96	.92	.89	1.00	.95	.92	.87	.94	.91	.89	.93	.90	.88	.91	.89	.87	.87	.87	.87	.87
7	.99	.93	.90	.87	.98	.93	.89	.85	.92	.89	.86	.91	.88	.86	.90	.87	.86	.85	.85	.85	.85
8	.97	.91	.87	.85	.96	.91	.87	.84	.90	.87	.85	.89	.86	.84	.88	.86	.84	.83	.83	.83	.83
9	.95	.89	.86	.83	.94	.89	.85	.82	.88	.85	.83	.87	.85	.83	.87	.84	.82	.82	.82	.82	.82
10	.93	.87	.84	.82	.92	.87	.84	.81	.86	.83	.81	.86	.83	.81	.85	.83	.81	.80	.80	.80	.80

Luminaire Report Summary

IESNA:LM-63-2002
[LUMCAT]
[LUMINAIRE] ZINO
[LAMP] 3000K, 18DEG
[USER DEFINED] 120.0 AC, 445.3 mA, 52.62 W, 0.9847 PF
[TEST]
[TESTLAB] INTERTEK
[ISSUEDATE] 2018-01-26
[MANUFAC] AQUARII, INC.

FILE: CREATED USING ABSOLUTE PHOTOMETRY
FILE: CANDELA MULTIPLIER: 1
FILE: VERTICAL ANGLES: 73, HORIZONTAL ANGLES: 17
FILE: COORDINATE SYSTEM: TYPE C
FILE: UNIT OF MEASURE: STANDARD
FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.28 copyright 2003-2018 by jSolutions, Inc.
Reported data calculated from manufacturer's data file, based on IES recommended methods.