



Filename: ZN-50-30-14

Manufacturer: AQUARII, INC.

Luminaire: ZINO

Lamp: 3000K, 14DEG

Lamp Output: 1 lamp, total luminaire Lumens: 4418.5

Max Candela: 55,556.5 at Horizontal: 0°, Vertical: 0°

Input Wattage: 52.3

Luminous Opening: Circular (Dia: 6.48")


Test Lab: INTERTEK

Photometry : Type C

CIE Class: Direct

Cutoff Class: Full Cutoff

Nema Type: 2 X 2

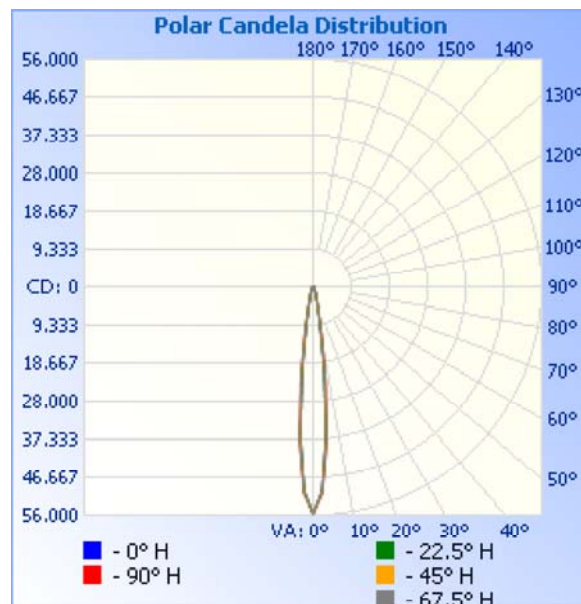


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	4,124.3	93.3%
0-40	4,313.8	97.6%
0-60	4,418.5	100%
60-90	0.0	0%
70-100	0	0%
90-120	0	0%
0-90	4,418.5	100%
90-180	0	0%
0-180	4,418.5	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	2,579.6	58.4%	90-100	0	0%
10-20	1,113.8	25.2%	100-110	0	0%
20-30	430.9	9.8%	110-120	0	0%
30-40	189.4	4.3%	120-130	0	0%
40-50	82.2	1.9%	130-140	0	0%
50-60	22.5	0.5%	140-150	0	0%
60-70	0.0	0.0%	150-160	0	0%
70-80	0	0.0%	160-170	0	0%
80-90	0	0.0%	170-180	0	0%

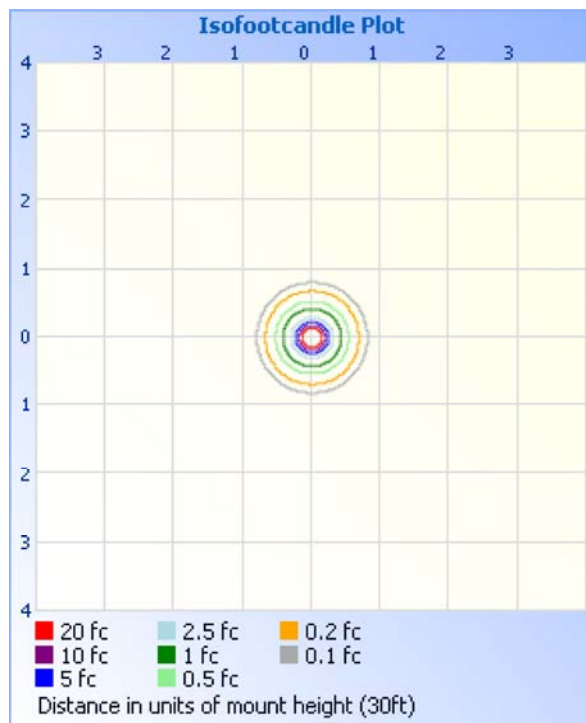

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	0
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.02	1.02	1.00
1	1.16	1.14	1.12	1.10	1.13	1.11	1.10	.98	1.08	1.06	1.05	1.04	1.04	1.03	1.02	1.01	1.00	.99	.99	.98	.98
2	1.12	1.09	1.06	1.04	1.10	1.07	1.05	.96	1.04	1.02	1.01	1.01	1.01	1.00	.99	.99	.98	.97	.97	.95	.95
3	1.09	1.05	1.02	.99	1.08	1.04	1.01	.94	1.01	.99	.97	.99	.97	.96	.96	.97	.96	.94	.94	.93	.93
4	1.06	1.02	.98	.96	1.05	1.01	.98	.92	.99	.96	.94	.97	.95	.93	.95	.94	.92	.91	.91	.91	.91
5	1.04	.99	.95	.93	1.03	.98	.95	.90	.96	.94	.91	.95	.93	.91	.94	.92	.90	.89	.89	.89	.89
6	1.02	.96	.93	.90	1.00	.96	.92	.88	.94	.91	.89	.93	.91	.89	.92	.90	.88	.87	.87	.87	.87
7	.99	.94	.90	.88	.98	.93	.90	.86	.92	.89	.87	.91	.89	.87	.90	.88	.86	.86	.86	.86	.86
8	.97	.92	.88	.86	.97	.91	.88	.85	.91	.88	.85	.90	.87	.85	.89	.87	.85	.84	.84	.84	.84
9	.96	.90	.87	.84	.95	.90	.86	.83	.89	.86	.84	.88	.86	.84	.88	.86	.84	.83	.83	.83	.83
10	.94	.88	.85	.83	.93	.88	.85	.82	.87	.84	.82	.87	.84	.82	.86	.84	.82	.81	.81	.81	.81

Luminaire Report Summary

IESNA:LM-63-2002

[LUMCAT]

[LUMINAIRE] ZINO

[LAMP] 3000K, 14DEG

[USER DEFINED] 120.0 AC, 443.5 mA, 52.41 W, 0.9847 PF

[TEST]

[TESTLAB] INTERTEK

[ISSUEDATE] 2018-01-26

[MANUFAC] AQUARII, INC.

FILE: CREATED USING ABSOLUTE PHOTOMETRY

FILE: CANDELA MULTIPLIER: 1

FILE: VERTICAL ANGLES: 73, HORIZONTAL ANGLES: 17

FILE: COORDINATE SYSTEM: TYPE C

FILE: UNIT OF MEASURE: STANDARD

FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.28 copyright 2003-2018 by jSolutions, Inc.

Reported data calculated from manufacturer's data file, based on IES recommended methods.