



## KAPRIX SPECIFICATIONS

### TYPICAL INSTALLATIONS

- Theatres and Performing Arts Centers
- Houses of Worship
- Convention Centers, Arenas and Exhibit Halls
- Museums
- Academic Institutions - Auditoriums
- Dry and Damp Locations
- Optimum Installation Heights: 25ft (7.6m) to 50ft (15.2m)

### LEDs, OPTIC AND OUTPUT


- 90+ CRI minimum each channel
- 95CRI typical both channels on
- 25, 35, and 60 degree beam
- 10,400 lumen output at 140W
- CCT Range: 2700K to 6500K

### PHYSICAL

- 9.75in (247.6mm) diameter
- 14.57in (370.0mm) length
- Unit weight: 10lbs (4.5kg) without mountings
- High performance LED engine, driver and power supplies
- No noise with efficient passive cooling (no internal fans)
- All aluminum construction
- Standard black and off-white housing colors available in matte, semi-gloss, or glossy finishes

### OPTIONS

- Custom RAL color housings
- Custom housing graphics
- Brushed aluminum housing
- Mounting options include: C-clamp, Wall Bracket, Yoke, Pendant (up to 42° swivel), Air Craft Cable, and Flat/ Sloped Ceiling Recessed Kits
- DMX Connectors: RJ45 (standard), XLR 5-PIN, and Screw Terminal

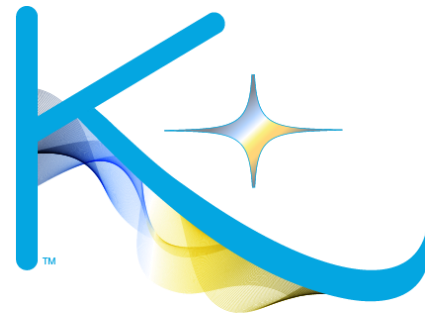

Kaprix™ by AQUARIUM



PROJECT- \_\_\_\_\_  
ORDER CODE- \_\_\_\_\_  
QUANTITY- \_\_\_\_\_

### ELECTRICAL

- Available Wattage: 140W
- 100-305 VAC, 47-63 Hz
- IP20 Rated
- ETL listed to UL and cUL standards
- Rated for non-IC (Insulation Contact) Environments

### CONTROLS

- DMX/RDM
- 2 Channel DMX (CCT, Intensity)

*Please note that any custom orders or request may result in a longer lead time and additional costs.*



For further information on products, design and engineering services, specifications, IES downloads, and pricing, call (315)672-8807, visit our website at [www.aquariitech.com](http://www.aquariitech.com), or e-mail [sales@aquariitech.com](mailto:sales@aquariitech.com)

**Ordering Code Example:** KA-35-D-B-M-1-B-R-N

| TYPE - KA                                                                                                                                                                                                           |                                     |                                              |                          |                                                              |                                                           |                                |                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------|--------------------------|--------------------------------------------------------------|-----------------------------------------------------------|--------------------------------|--------------------|
| Beam Angle Degree                                                                                                                                                                                                   | Control                             | Housing Color                                | Color Finish             | Mounting                                                     | Power Connector <sup>1</sup>                              | Terminals                      | Options            |
| 25                                                                                                                                                                                                                  | <b>D</b><br>(DMX/RDM <sup>2</sup> ) | <b>B</b><br>(Black)                          | <b>M</b><br>(Matte)      | <b>1</b><br>(C-Clamp)                                        | <b>B</b><br>(Bare End;<br>5ft (1.5m) Std. <sup>5</sup> )  | <b>R</b><br>(RJ-45 / standard) | <b>N</b><br>(None) |
| 35                                                                                                                                                                                                                  |                                     | <b>W</b><br>(Off-White)                      | <b>S</b><br>(Semi-Gloss) | <b>2</b><br>(Wall Bracket)                                   | <b>515</b><br>(NEMA 5-15;<br>125V/15A)                    | <b>X</b><br>(XLR-5 Pin)        |                    |
| 60                                                                                                                                                                                                                  |                                     | <b>C</b><br>(Custom <sup>1</sup> )           | <b>G</b><br>(Gloss)      | <b>3</b><br>(Yoke)                                           | <b>L515</b><br>(NEMA L5-15;<br>125V/15A,<br>Locking-type) | <b>ST</b><br>(Screw Terminal)  |                    |
|                                                                                                                                                                                                                     |                                     | <b>A</b><br>(Brushed Aluminum <sup>1</sup> ) |                          | <b>4</b><br>(Pendant;<br>Length required)                    | <b>AP</b><br>(Alternate Plug Style <sup>1</sup> )         |                                |                    |
|                                                                                                                                                                                                                     |                                     | <b>G</b><br>(Graphic <sup>1</sup> )          |                          | <b>5</b><br>(Air Craft Cable<br>Pendant; Length<br>required) | <b>N</b><br>(None)                                        |                                |                    |
|                                                                                                                                                                                                                     |                                     |                                              |                          | <b>6</b><br>(Flat Recessed)                                  |                                                           |                                |                    |
|                                                                                                                                                                                                                     |                                     |                                              |                          | <b>7</b><br>(Sloped<br>Recessed <sup>1, 4</sup> )            |                                                           |                                |                    |
| <sup>1</sup> Consult factory before ordering.<br><sup>2</sup> DMX/RDM controls choice can be connected with DMX or DMX/RDM controls.<br><sup>4</sup> Recessed sloped kits must be installed in accessible ceilings. |                                     |                                              |                          |                                                              |                                                           |                                |                    |